

BILDISCO DOOR Mfg.

SALES • INSTALLATION • SERVICE

ARCHITECTURAL • INSTITUTIONAL • COMMERCIAL • APARTMENT DOOR OPENINGS


- HOLLOW METAL DOORS & FRAMES
- ALUMINUM STOREFRONTS
- ARCHITECTURAL, INSTITUTIONAL, COMMERCIAL GRADE WOOD DOORS

21 Central Avenue
West Orange, NJ 07052
Call 973/673-2400 • Fax 973/673-2236
www.bildisco.com

- BUILDERS & CONTRACT HARDWARE
- FIBERGLASS (FRP) DOORS
- APARTMENT DOORS
- LICENSED BY WARNOCK HERSEY FOR FIRE RATED (LABELLED) OPENINGS

"The Door Doctors offer the Total Package for Immediate Delivery"

FIELD MEASUREMENT GUIDE

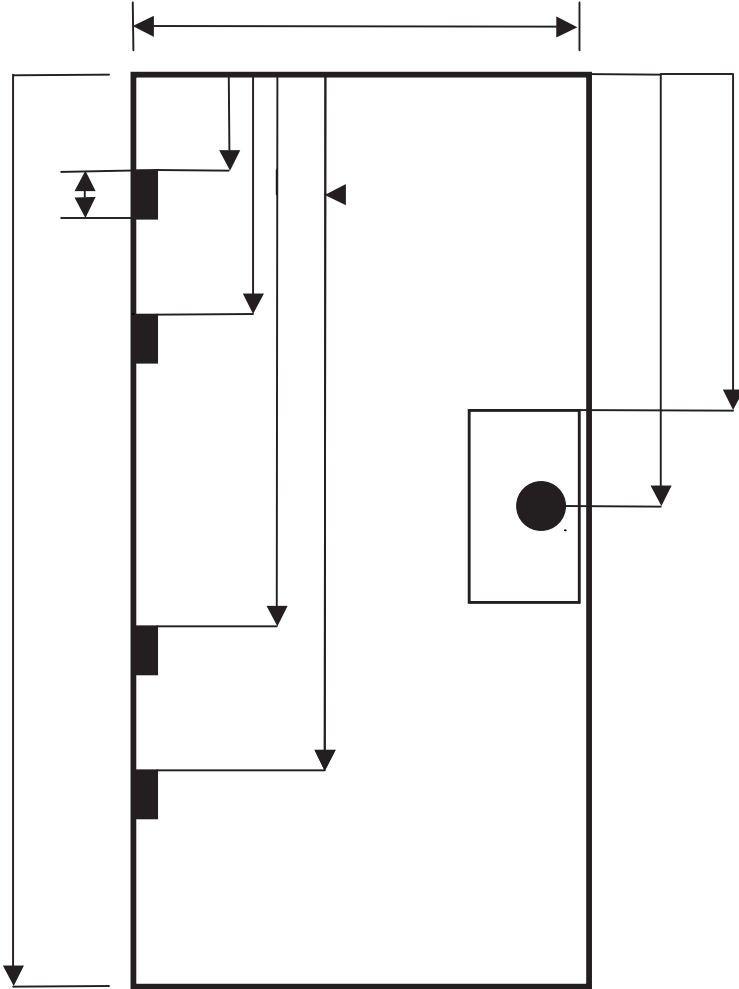

Width _____
 Height _____
 Swing _____
 Hinge size _____

Type: circle one
 HM, BIRCH, OAK, OTHER
 Flush _____


Lite/Louver size _____
 Location: draw in door
 Glass: Wire ___ Clear ___

Fire Rating:
 20min ___ 60min ___ 90min ___
 3hour ___

Hinge locations circle one:
 Frame _____ Door _____

From top of door to:
 Top of 1st hinge _____
 Top of 2nd hinge _____
 Top of 3rd hinge _____
 Top of 4th hinge _____

Lock location
 From top of door to center of
 Lock _____

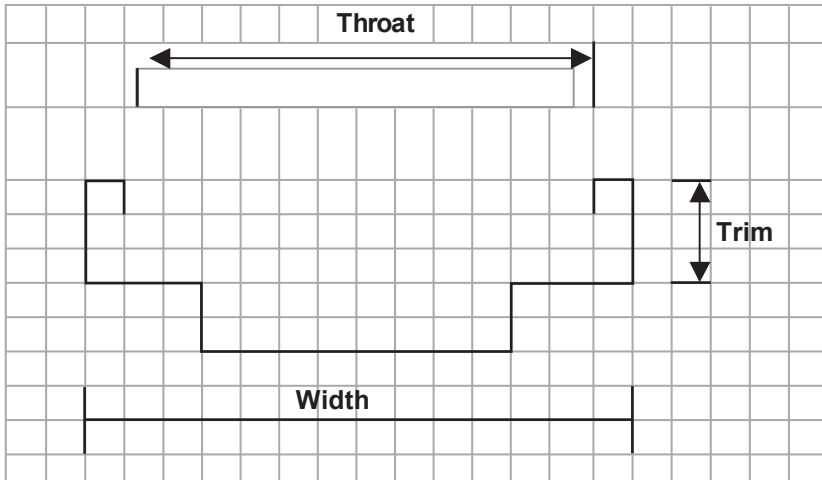


Jamb Throat _____
 Jamb Width _____

NOTES:

SWING GUIDE

| L | S | R | PU Unusual | PA | PR Standard |
|--------------------|----------------|--------------------|---|------------------|---|
| Left Hand | Slab | Right Hand | R - Inactive | R - Active | R - Active |
| Active | - | Active | L - Active | L - Active | L - Inactive |
| Hinge & Latch Prep | No Hdwe. Preps | Hinge & Latch Prep | Hinge, Latch, Strike Prep Top & Bottom FB Prep | Hinge Preps Only | Hinge, Latch, Strike Prep Top & Bottom FB Prep |

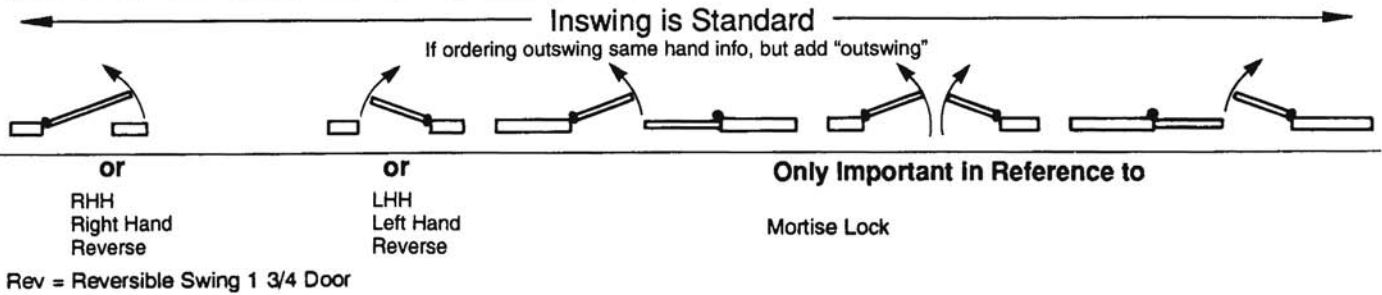


FRAME - STANDARD SPECIFICATIONS HARDWARE PREPS

1-3/4" FRAME

- ① - Locks, latches, panic location
- ② Dead lock location
- ②A Dead lock location for DRILL 4 1/2"

③ Hinge locations

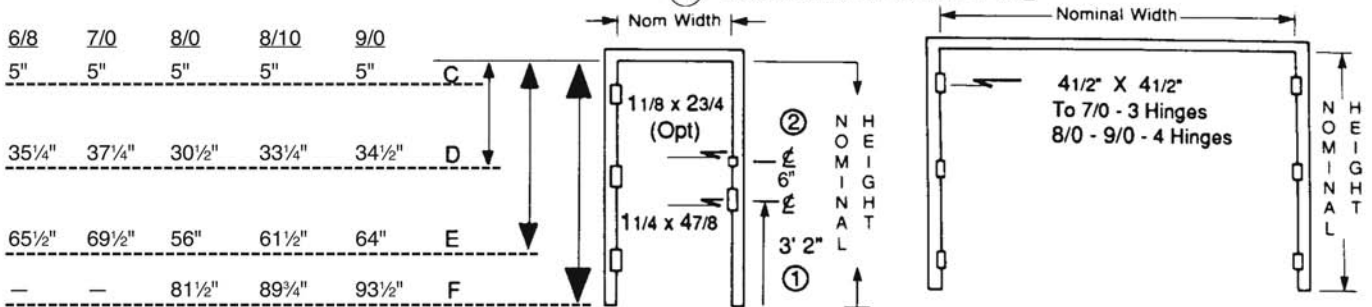

- Bottom hinge location may decrease up to 5" or less in height, if we cut down STD frame without relocation (maximum 5") strike decrease maximum = 2".
- Door opening size of frame is normally nominal width and height. Ex. 3/0x6/8=36" width head and 80" height leg.
- Information on wood frames & units not indicated.
- 5/0, 6/0 pair heads to have STD flush bolt prep

NOTES:

Contact Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone Number: _____

Email: _____