

# BILDISCO DOOR Mfg.

SALES • INSTALLATION • SERVICE

ARCHITECTURAL • INSTITUTIONAL • COMMERCIAL • APARTMENT DOOR OPENINGS


- HOLLOW METAL DOORS & FRAMES
- ALUMINUM STOREFRONTS
- ARCHITECTURAL, INSTITUTIONAL, COMMERCIAL GRADE WOOD DOORS

21 Central Avenue  
West Orange, NJ 07052  
Call 973/673-2400 • Fax 973/673-2236  
www.bildisco.com

- BUILDERS & CONTRACT HARDWARE
- FIBERGLASS (FRP) DOORS
- APARTMENT DOORS
- LICENSED BY WARNOCK HERSEY FOR FIRE RATED (LABELLED) OPENINGS

"The Door Doctors offer the Total Package for Immediate Delivery"

## FIELD MEASUREMENT GUIDE

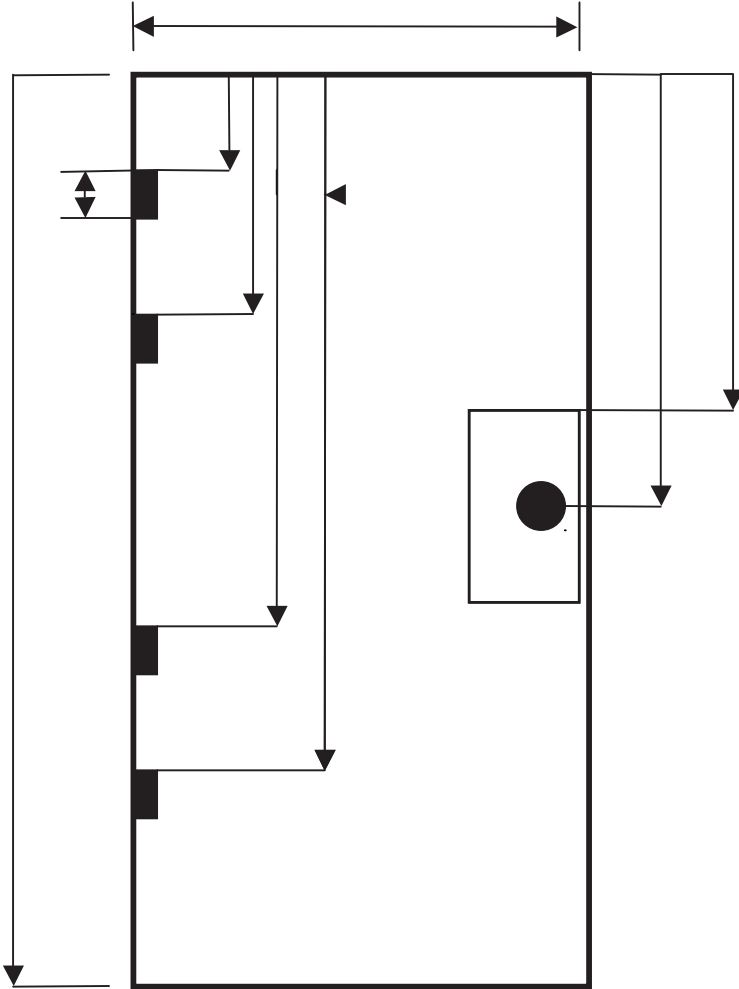

Width \_\_\_\_\_  
Height \_\_\_\_\_  
Swing \_\_\_\_\_  
Hinge size \_\_\_\_\_

Type: circle one  
HM, BIRCH, OAK, OTHER  
Flush \_\_\_\_\_


Lite/Louver size \_\_\_\_\_  
Location: draw in door  
Glass: Wire \_\_\_ Clear \_\_\_

Fire Rating:  
20min \_\_\_ 60min \_\_\_ 90min \_\_\_  
3hour \_\_\_

Hinge locations circle one:  
Frame \_\_\_\_\_ Door \_\_\_\_\_

**From top of door to:**  
Top of 1<sup>st</sup> hinge \_\_\_\_\_  
Top of 2<sup>nd</sup> hinge \_\_\_\_\_  
Top of 3<sup>rd</sup> hinge \_\_\_\_\_  
Top of 4<sup>th</sup> hinge \_\_\_\_\_

Lock location  
From top of door to center of  
Lock \_\_\_\_\_

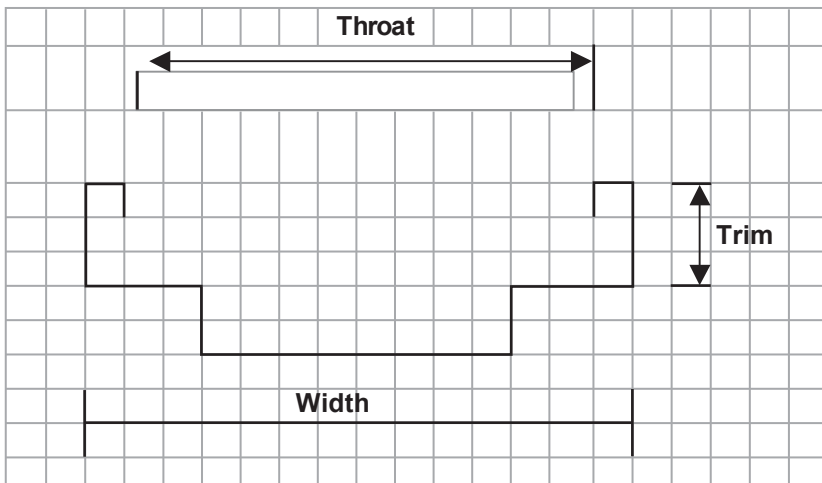

Jamb Throat \_\_\_\_\_  
Jamb Width \_\_\_\_\_

### NOTES:

---



---




---



---

# SWING GUIDE

<b>L</b>	<b>S</b>	<b>R</b>	<b>PU</b> Unusual	<b>PA</b>	<b>PR</b> Standard
Left Hand	Slab	Right Hand	R - Inactive	R - Active	R - Active
Active	-	Active	L - Active	L - Active	L - Inactive
Hinge & Latch Prep	No Hdwe. Preps	Hinge & Latch Prep	Hinge, Latch, Strike Prep Top & Bottom FB Prep	Hinge Preps Only	Hinge, Latch, Strike Prep Top & Bottom FB Prep

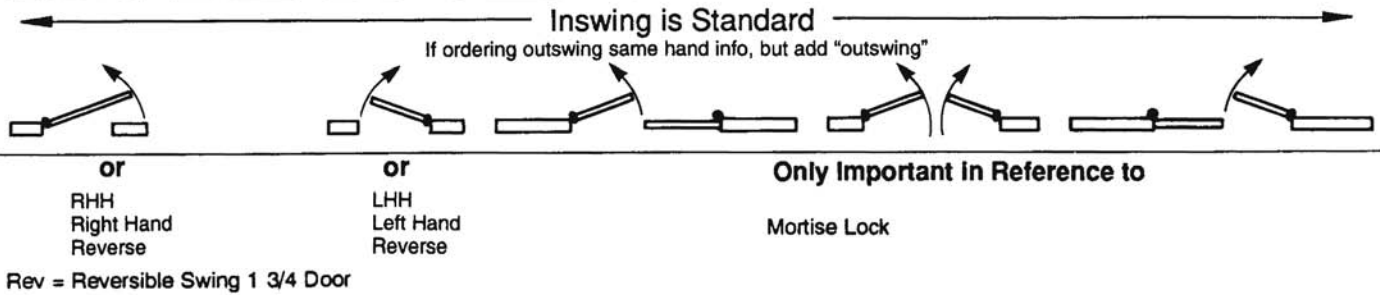


# FRAME - STANDARD SPECIFICATIONS HARDWARE PREPS

1-3/4" FRAME

- ① - Locks, latches, panic location
- ② Dead lock location
- ②A Dead lock location for DRILL 4 1/2"

③ Hinge locations

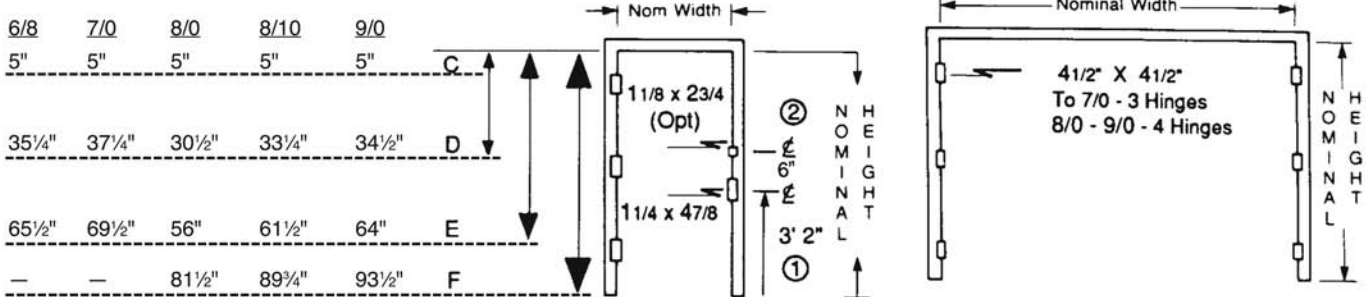

- Bottom hinge location may decrease up to 5" or less in height, if we cut down STD frame without relocation (maximum 5") strike decrease maximum = 2".
- Door opening size of frame is normally nominal width and height. Ex. 3/0x6/8=36" width head and 80" height leg.
- Information on wood frames & units not indicated.
- 5/0, 6/0 pair heads to have STD flush bolt prep

**NOTES:**

---

---

---

---

---

---

---

---

Contact Name: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone Number: \_\_\_\_\_

Email: \_\_\_\_\_